

JEWELRY

RECESSED



EFFECT 28X TUNABLE 01



EFFECT 28X COLOR 02




EFFECT 28X 03




EFFECT 14X 04




EFFECT 7X 05



EFFECT 28S TUNABLE 06



EFFECT 28S COLOR 07



EFFECT 28S 08



EFFECT 16S 09



EFFECT 9S 10



EFFECT 28C TUNABLE 11



EFFECT 28C COLOR 12




EFFECT 28C 13




EFFECT 16C 14




EFFECT 6C 15



BLADE 24C 16



BLADE 12C 17



BLADE 6C 18



BLADE 25X 20



BLADE 20X 21



BLADE 15X 22




BLADE 10X 23




BLADE 5X 24


SURFACE



BLADE 24SM 25



BLADE 12SM 26



BLADE 6SM 27



BLADE 25X SM 28



BLADE 20X SM 29



BLADE 15X SM 30




BLADE 10X SM 31




BLADE 5X SM 32


FOOTED




FOOTED 3X 33



FOOTED 1X 34



FOOTED 1S 35



LINE 36






LINE PIPE 37

Effect 28X Tunable



Recessed

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

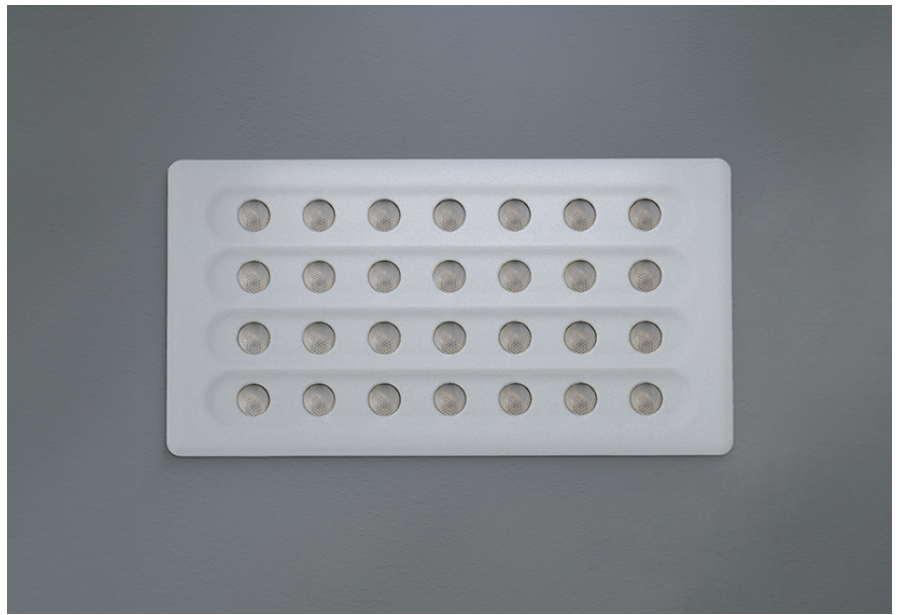

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC

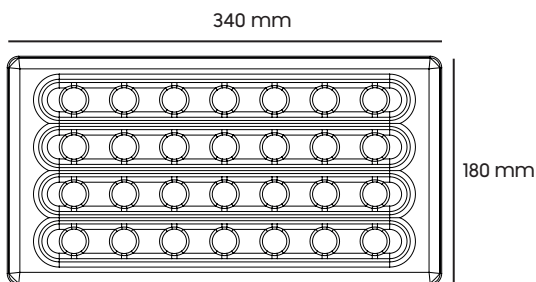

Effect 28X Color

Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X Color	on-off/DALI	48W	8880LM	90	220V-240V AC

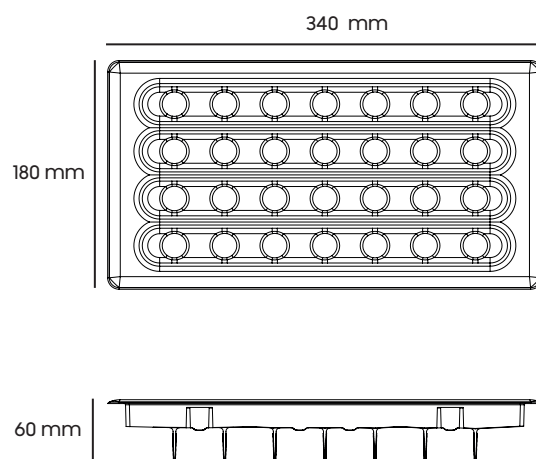


Effect 28X



Recessed

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X	on-off/DALI	48W	8880LM	90	220V-240V AC

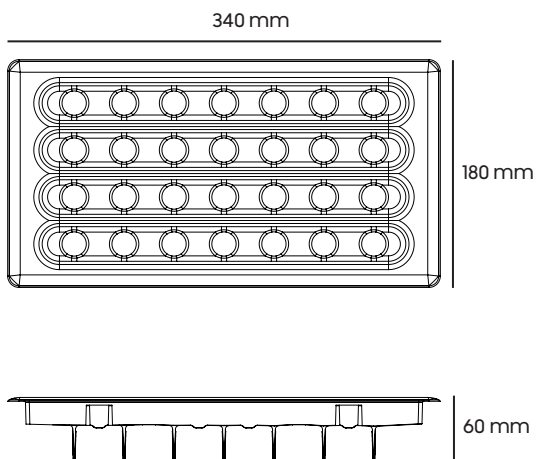

Effect 14X

Recessed





Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 14X	on-off/DALI	24W	4440LM	90	220V-240V AC

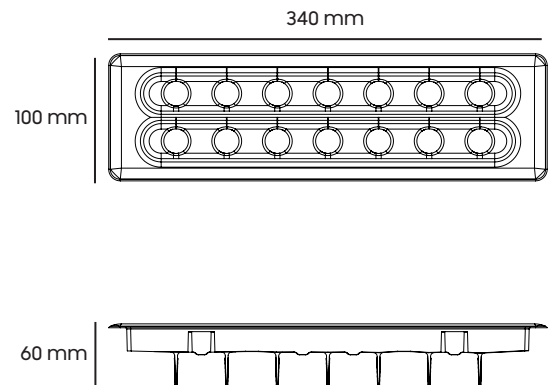

Effect 7X

Recessed



Quick info



Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 7X	on-off/DALI	14W	2220LM	90	220V-240V AC

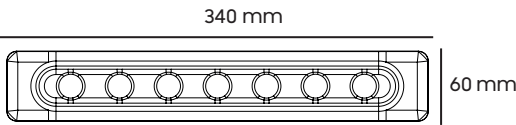


Effect 28S Tunable

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28S Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC


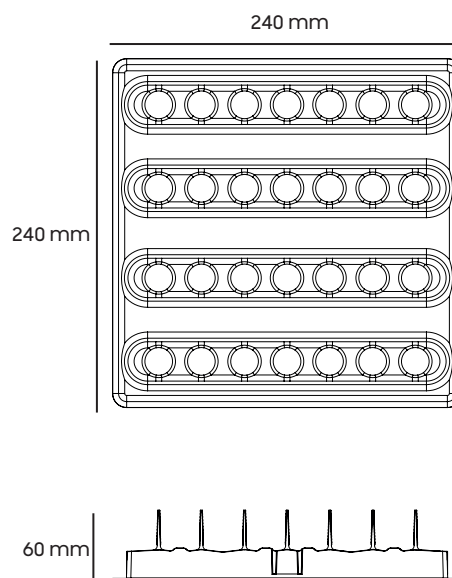


Effect 28S Color



Recessed

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

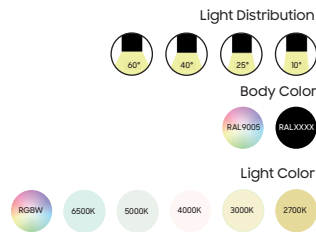

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28S Color	on-off/DALI	48W	8880LM	90	220V-240V AC

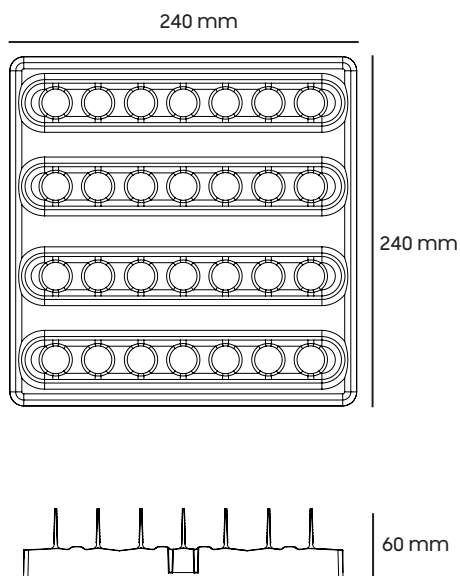


Effect 28S

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28S	on-off/DALI	48W	8880LM	90	220V-240V AC

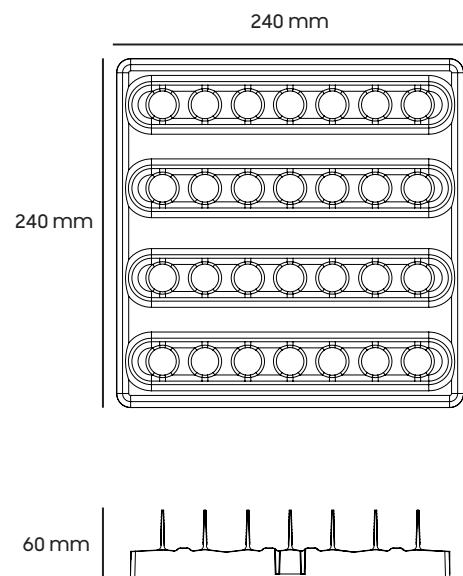


Effect 16S




Recessed

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 16S	on-off/DALI	28W	5074LM	90	220V-240V AC

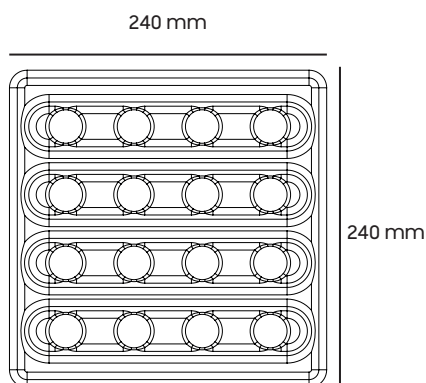


Effect 9S

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution






Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 9S	on-off/DALI	16W	2850LM	90	220V-240V AC

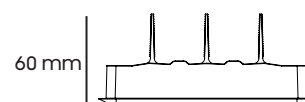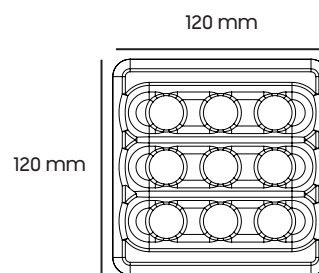


Effect 28C Tunable



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

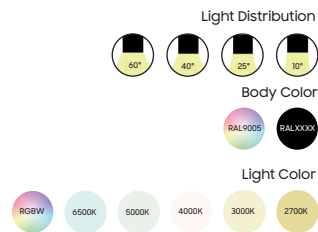

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28C Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC

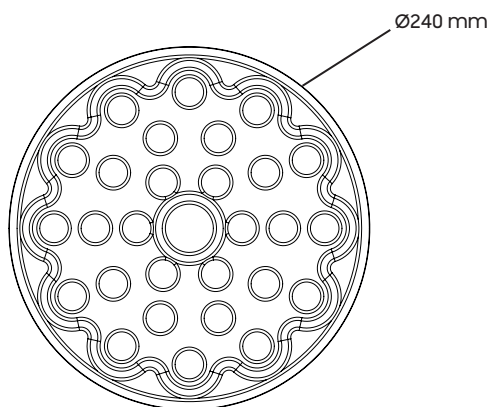

Effect 28C Color

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28C Color	on-off/DALI	48W	8880LM	90	220V-240V AC

Ø240 mm

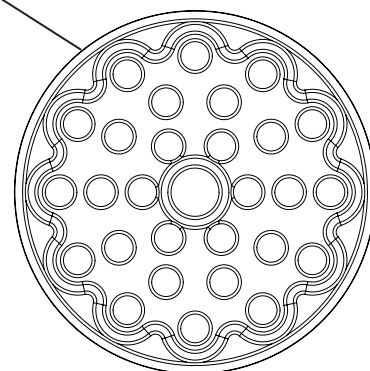

60 mm



Ø220mm




Effect 28C



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28C	on-off/DALI	48W	8880LM	90	220V-240V AC

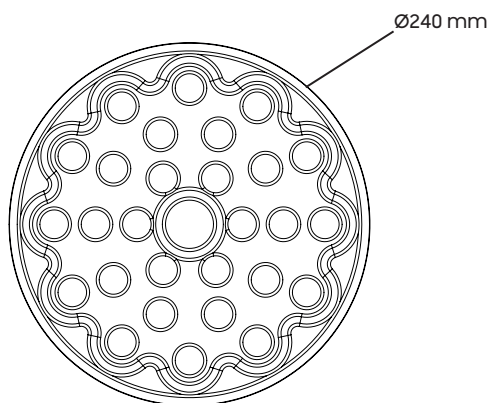

Effect 16C

Recessed



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 16C	on-off/DALI	28W	5075LM	90	220V-240V AC

Ø180 mm



60 mm



Ø160mm




Effect 6C



Recessed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

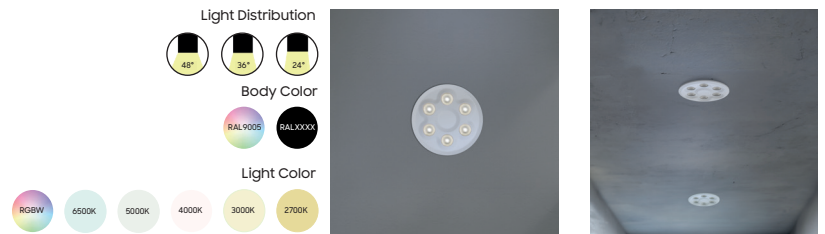


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 6C	on-off/DALI	10W	1900LM	90	220V-240V AC





Blade 24C

Recessed

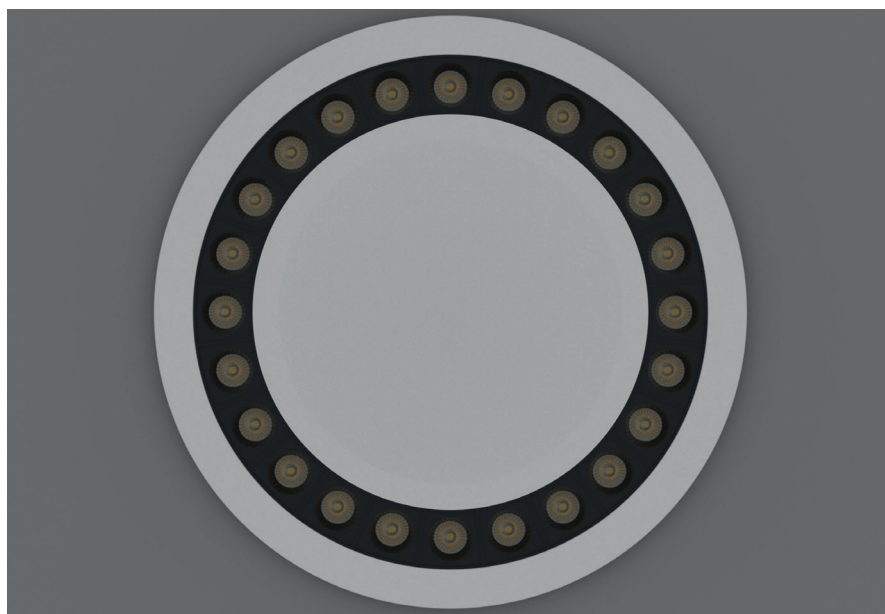

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 24C	on-off/DALI	42W	7610LM	90	220V-240V AC

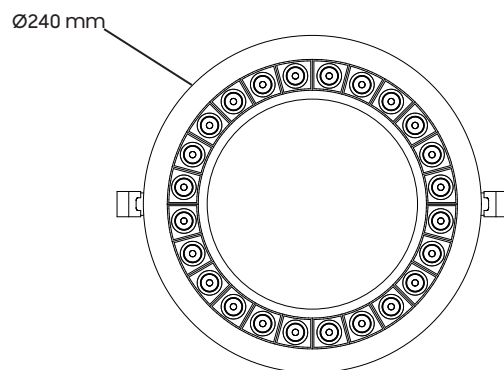

65 mm



Ø230mm




Blade 12C

Recessed

Quick info


Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

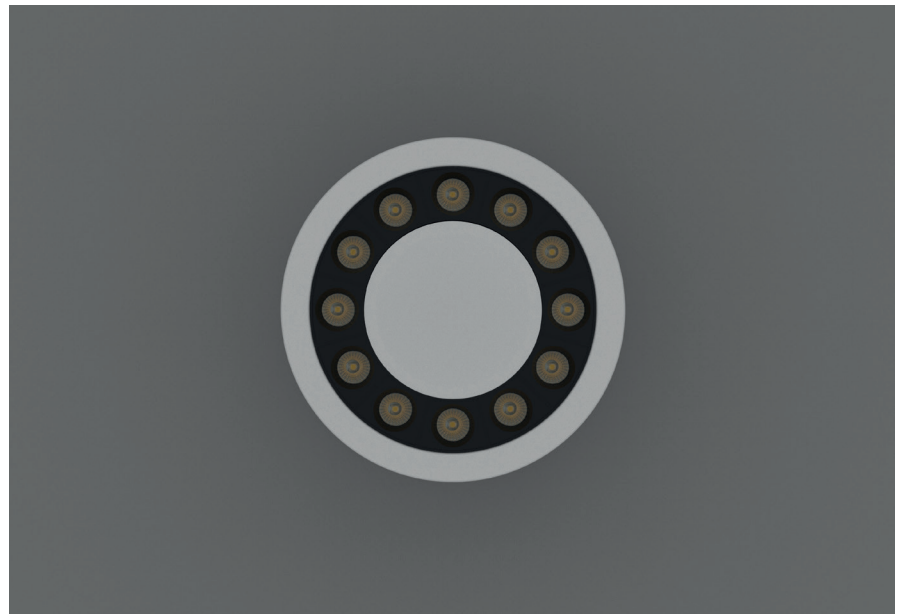



Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 12C	on-off/DALI	21W	3805LM	90	220V-240V AC

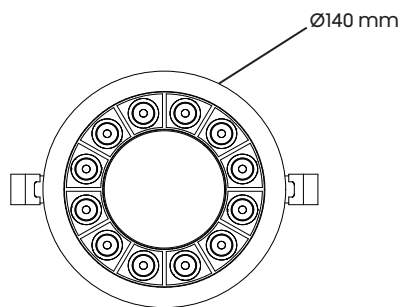



Blade 6C

Recessed

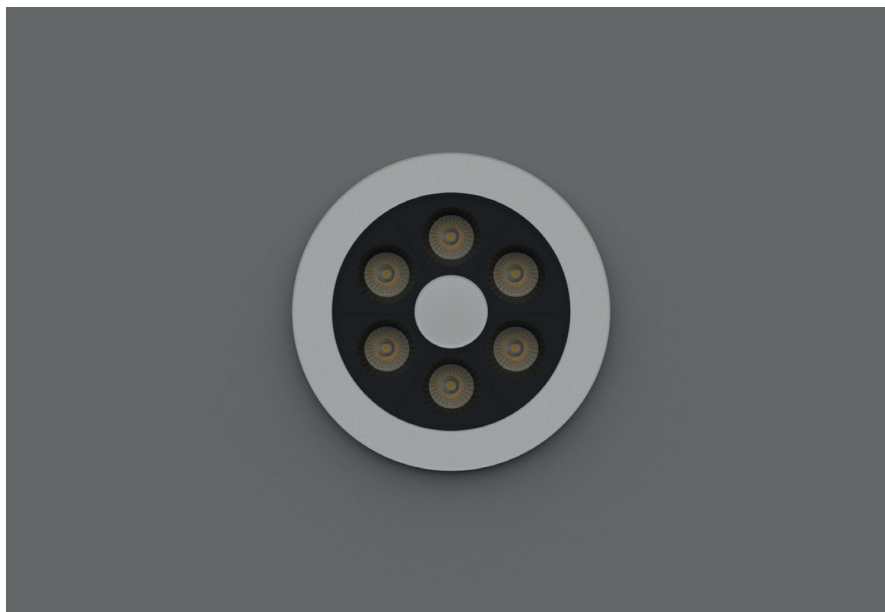

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 6C	on-off/DALI	10W	1900LM	90	220V-240V AC

Ø95 mm



65 mm




Ø85mm



IMAGE
Recessed



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Effect 28X Tunable	on-off/DALI	48W	8880LM	90	220V-240V AC

340



Blade 25X

Recessed

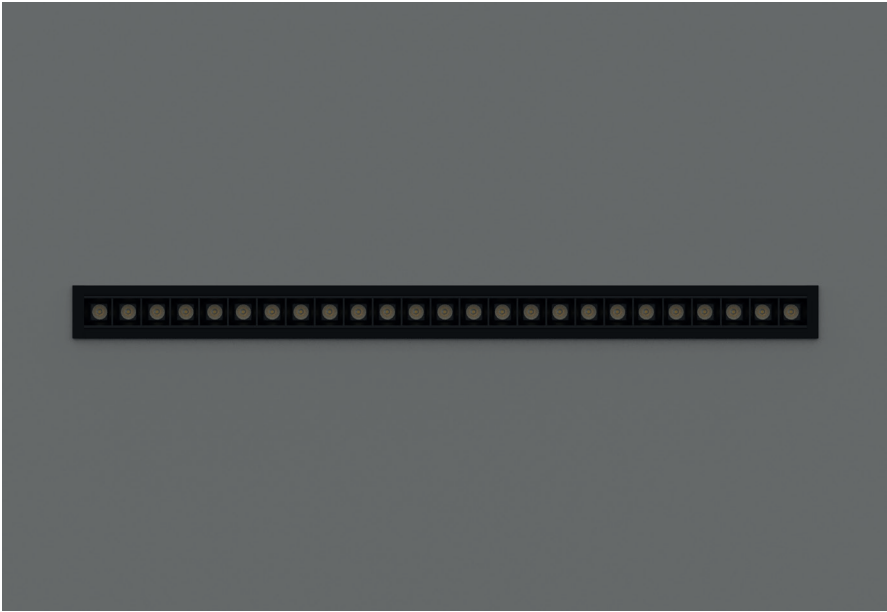

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 25X	on-off/DALI	45W	8325LM	90	220V-240V AC

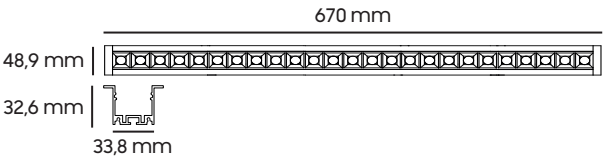

Blade 20X

Recessed

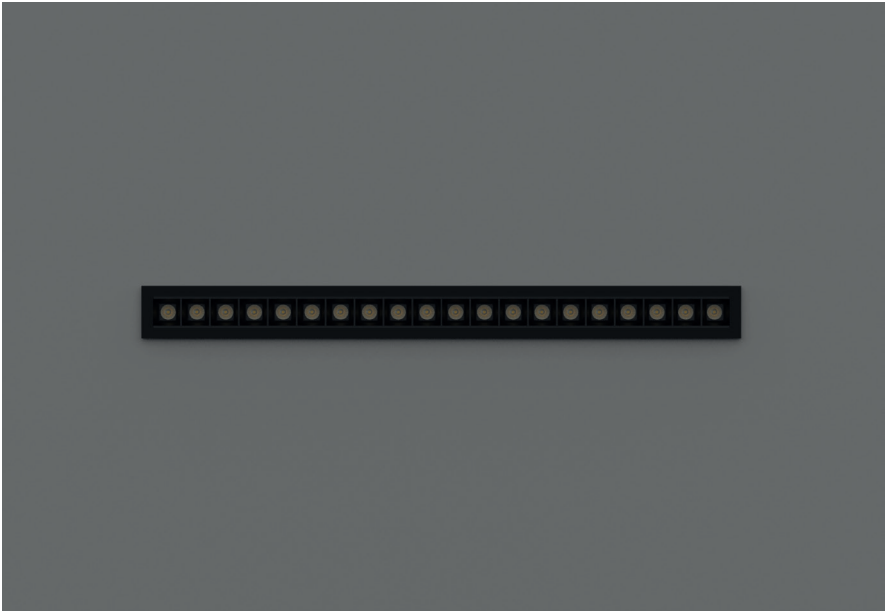

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

48°

36°

24°

RAL 9005

RAL XXXX

RGBW

6500K



5000K

4000K

3000K


2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 20X	on-off/DALI	36W	6660LM	90	220V-240V AC


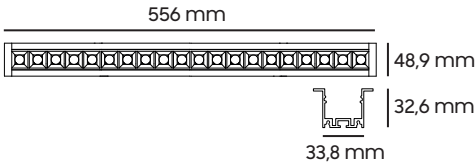


Blade 15X

Recessed

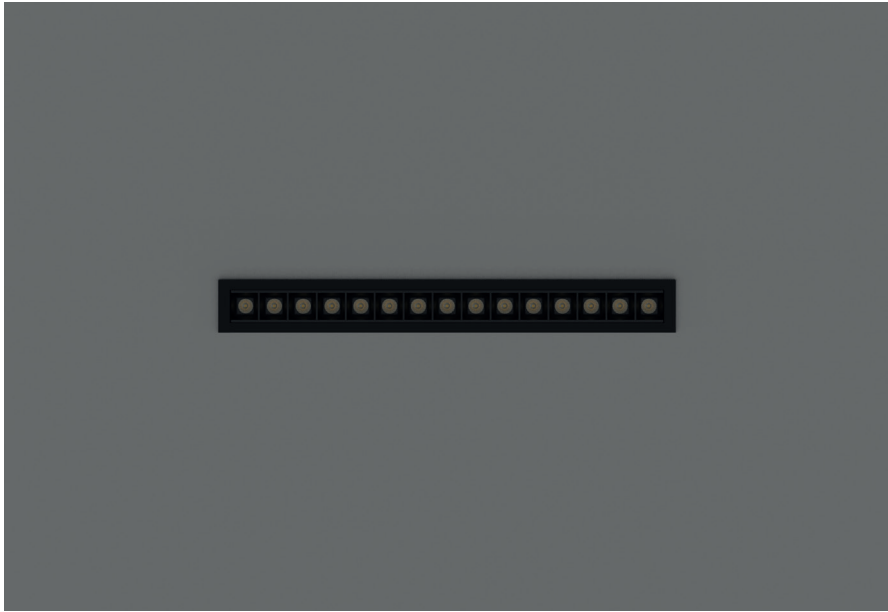

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 15X	on-off/DALI	27W	4995LM	90	220V-240V AC

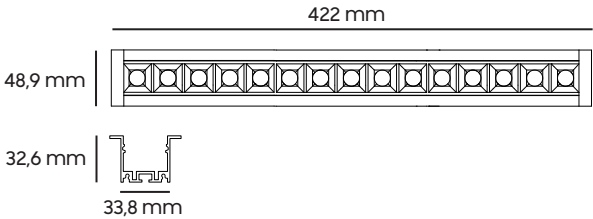

Blade 10X

Recessed

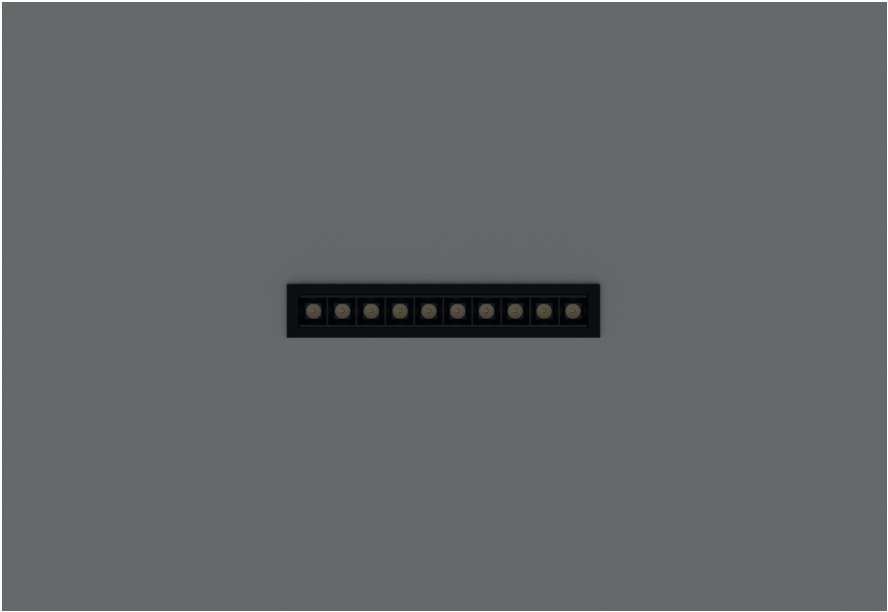

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

48° 36° 24°



Body Color

RAL 9005 RAL 9006

Light Color


RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 10X	on-off/DALI	18W	3330LM	90	220V-240V AC

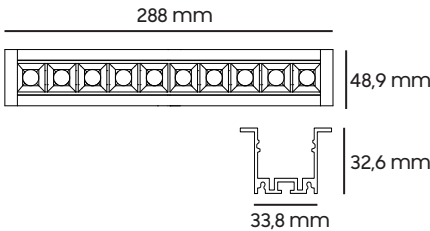

Blade 5X

Recessed

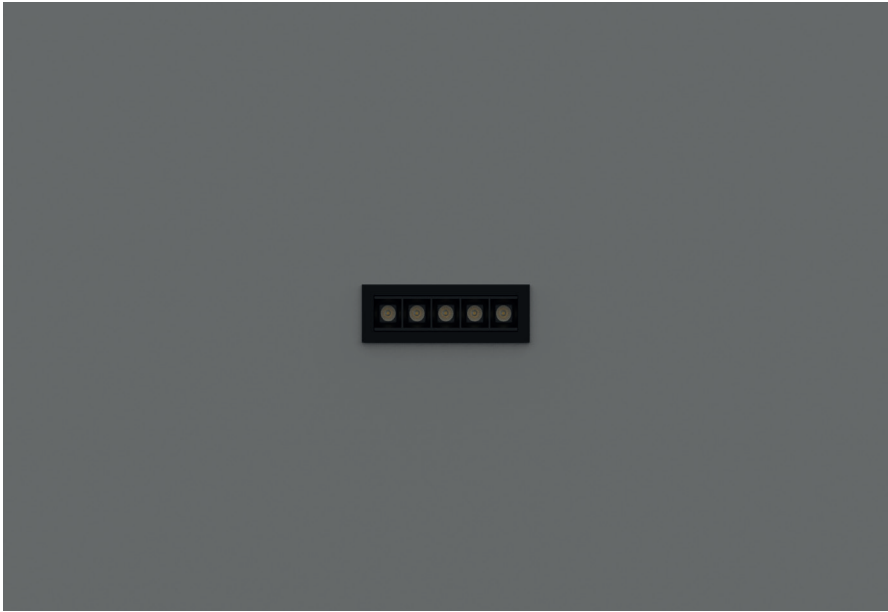

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°



Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 5X	on-off/DALI	9W	1665LM	90	220V-240V AC




Blade 24SM

Surface

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

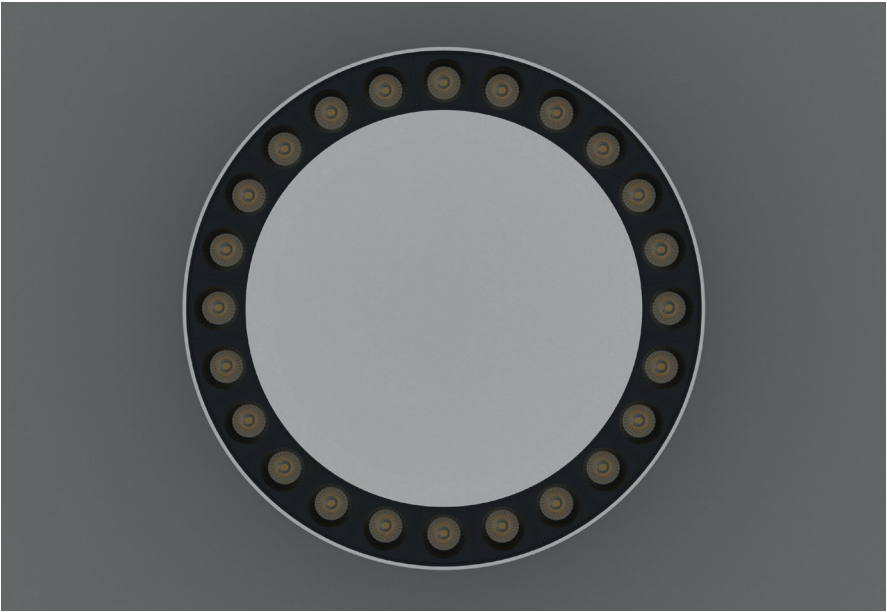


Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 24SM	on-off/DALI	42W	7610LM	90	220V-240V AC

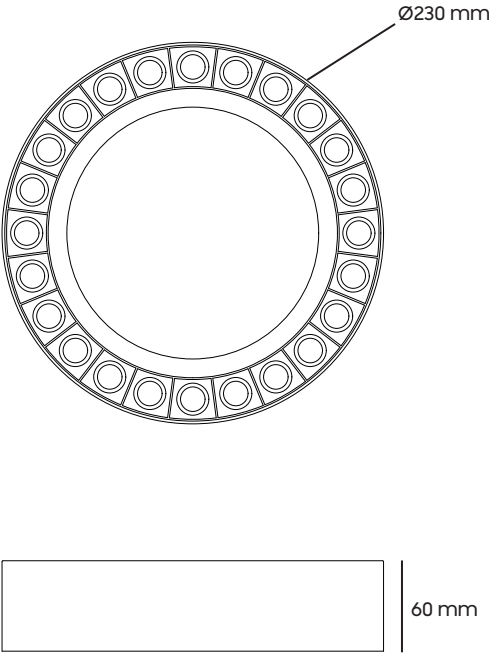



Blade 12SM

Surface

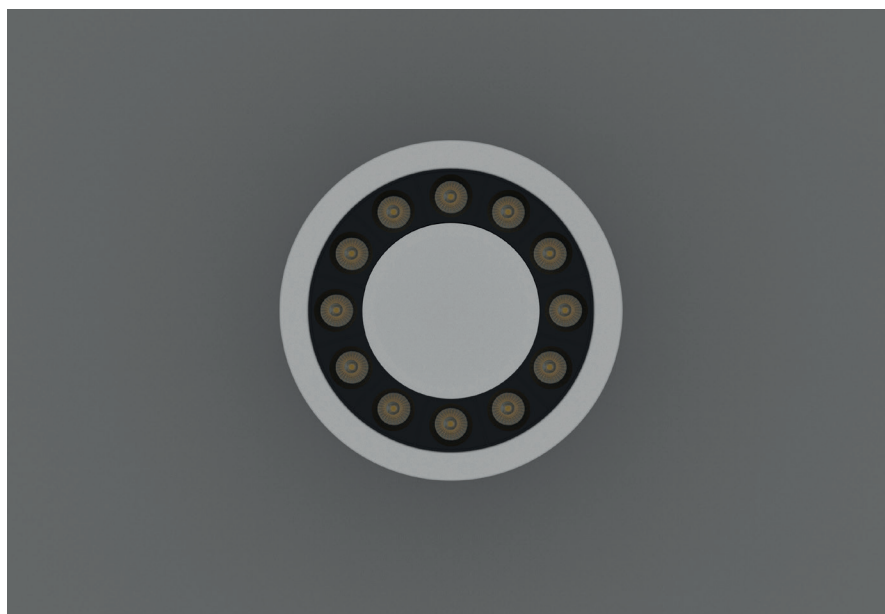

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution



Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 12SM	on-off/DALI	21W	3805LM	90	220V-240V AC

Ø140 mm



100 mm





Blade 6SM


Surface

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

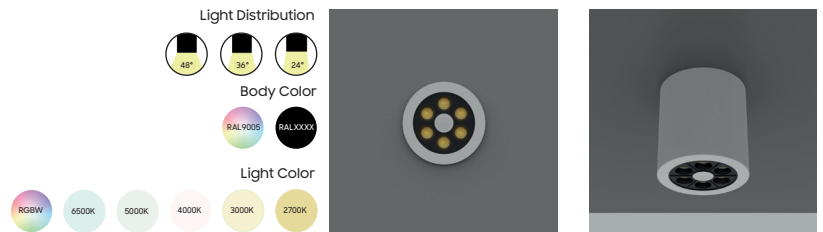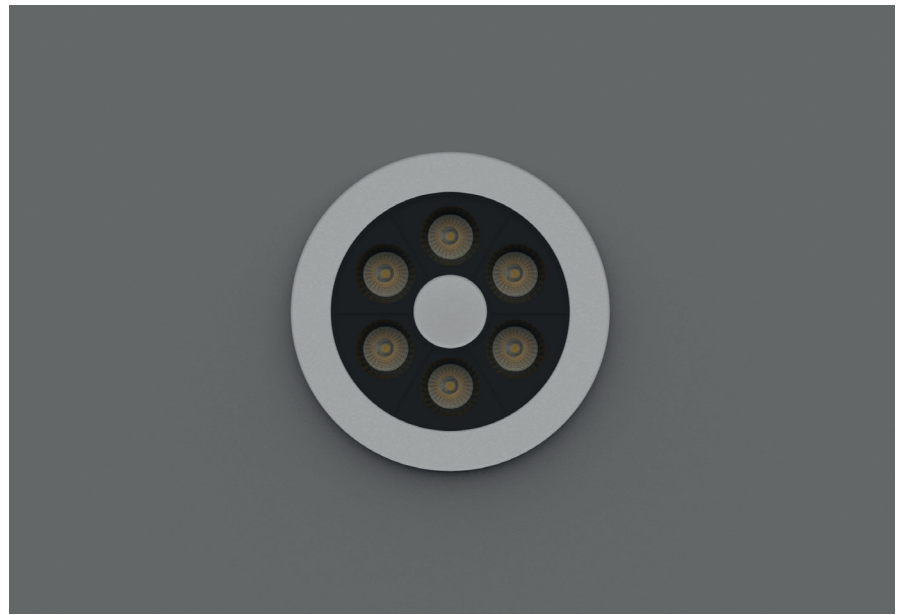


Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 6SM	on-off/DALI	10W	1900LM	90	220V-240V AC

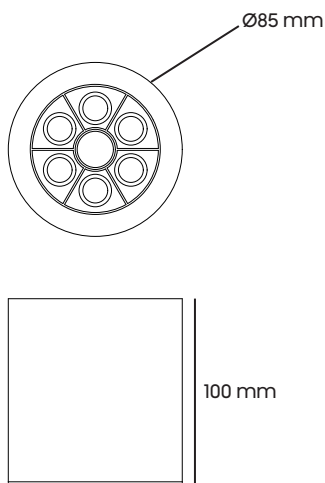


Blade 25X SM

Surface

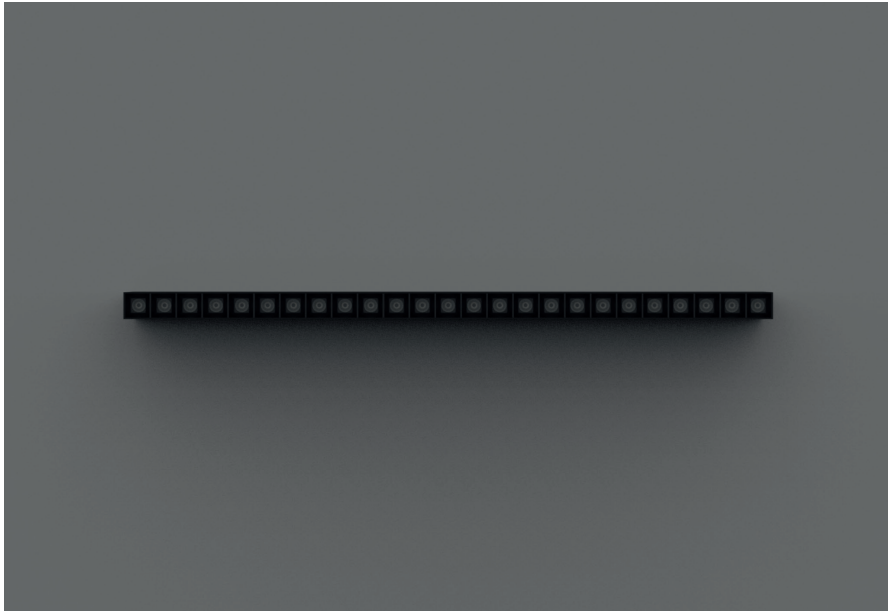

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0





Light Distribution

24° 36° 48°


Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 25X SM	on-off/DALI	45W	8325LM	90	220V-240V AC

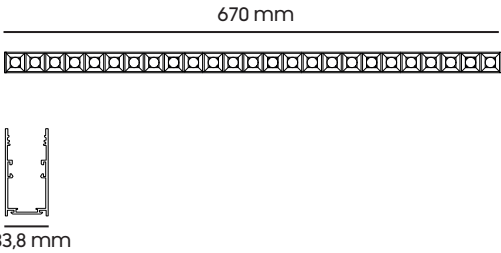

Blade 20X SM

Surface

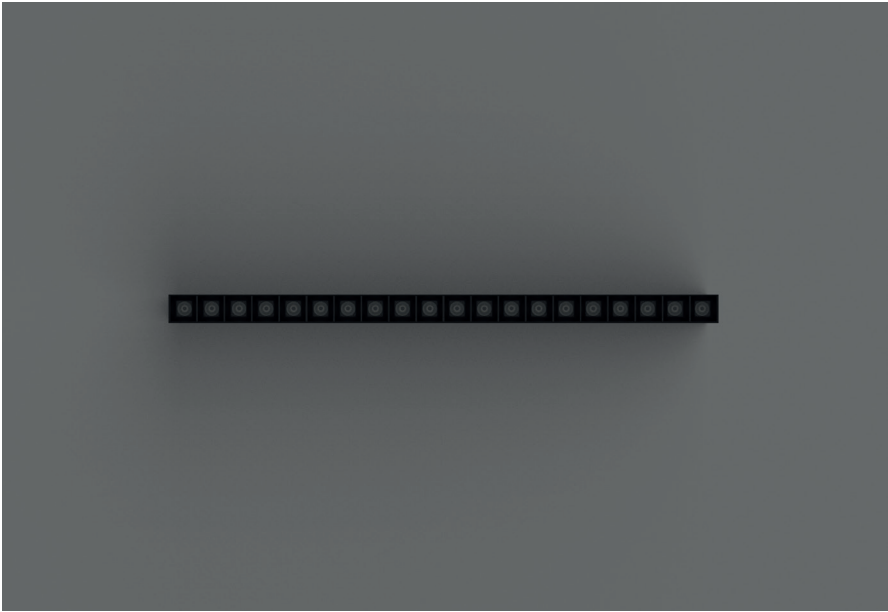

Quick info



Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 20X SM	on-off/DALI	36W	6660LM	90	220V-240V AC



Blade 15X SM

Surface

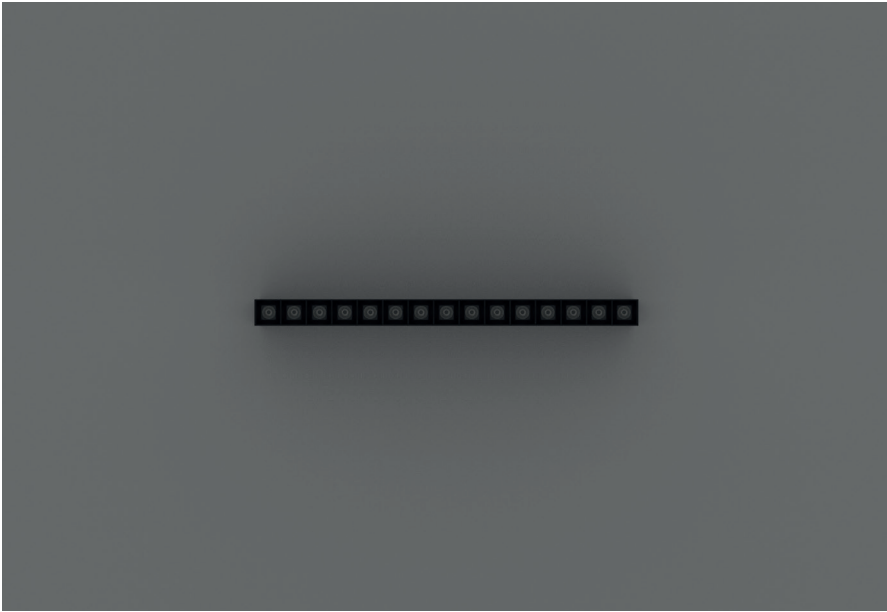

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

24° 36° 48°


Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 15X SM	on-off/DALI	27W	4995LM	90	220V-240V AC

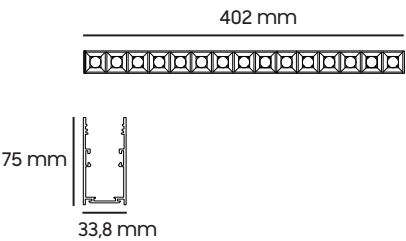

Blade 10X SM

Surface

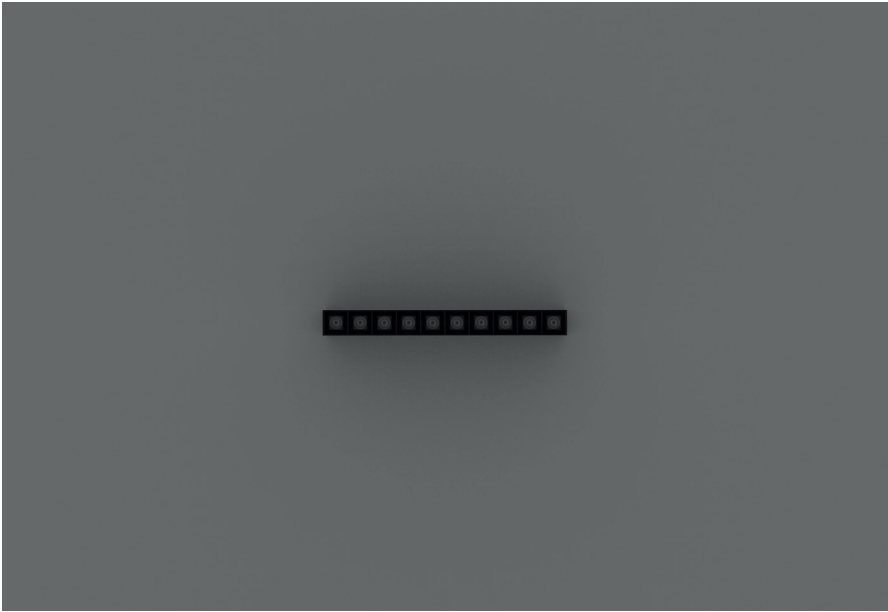

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

48° 36° 24°


Body Color

RAL 9005 RAL XXXX

Light Color


RGBW 6500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 10X SM	on-off/DALI	18W	3330LM	90	220V-240V AC





Blade 5X SM

Surface

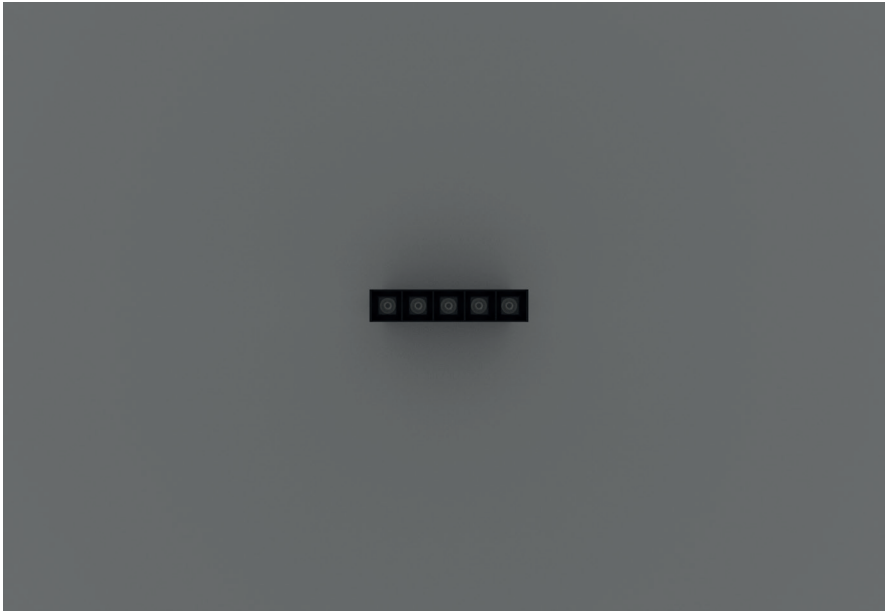

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0



Light Distribution

24° 36° 48°


Body Color

RAL 9005 RAL 9005

Light Color

2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Blade 5X SM	on-off/DALI	9W	1665LM	90	220V-240V AC




Footed 3X

Footed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

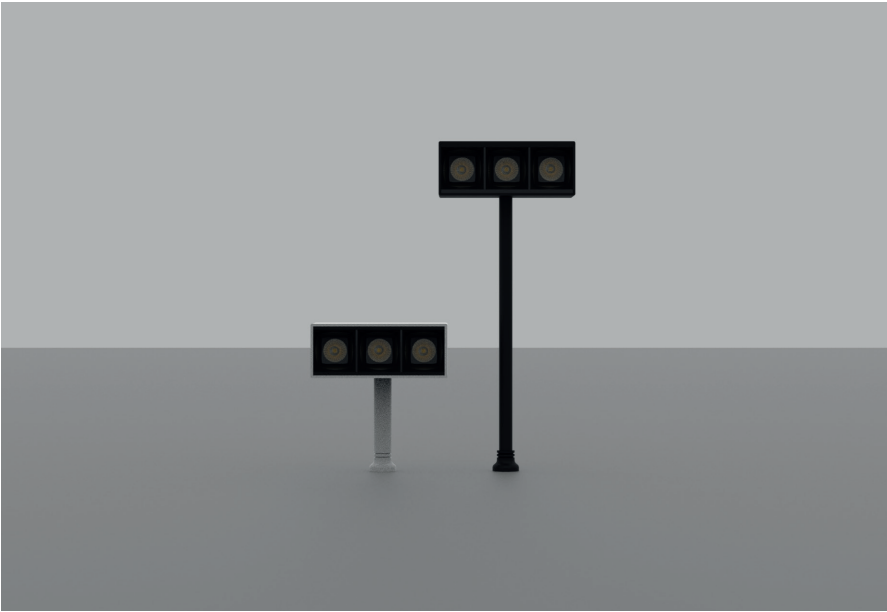


Light Distribution

Body Color


Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Footed 3X	on-off/DALI	5W	950LM	90	220V-240V AC

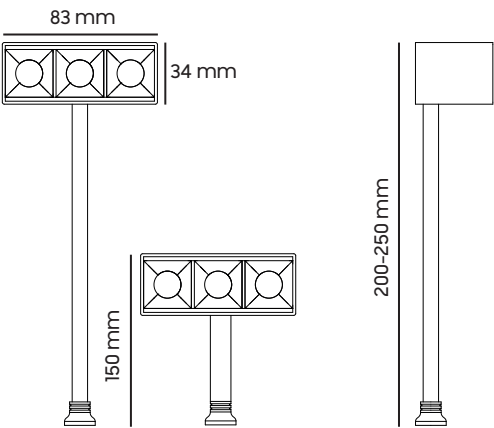



Footed 1X

Footed

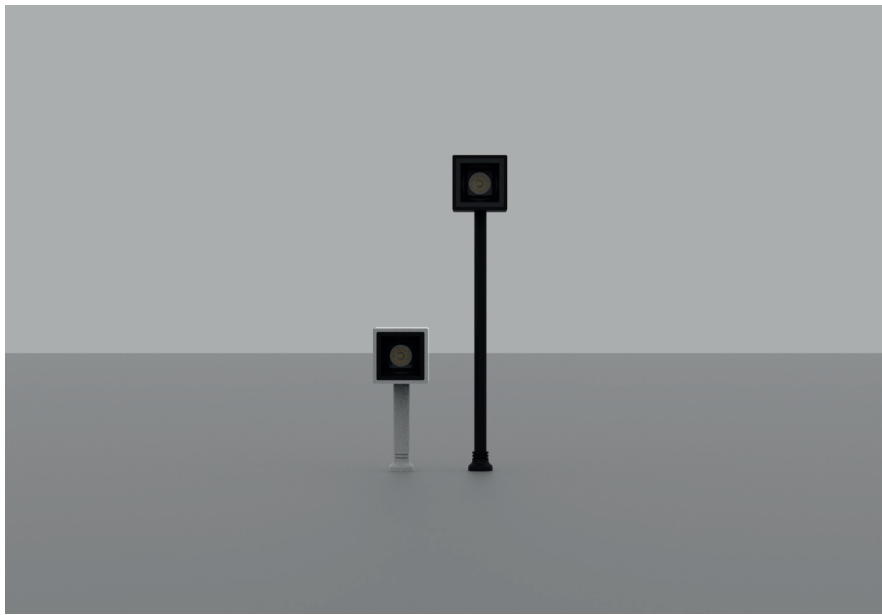

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Footed 1X	on-off/DALI	2W	370LM	90	220V-240V AC

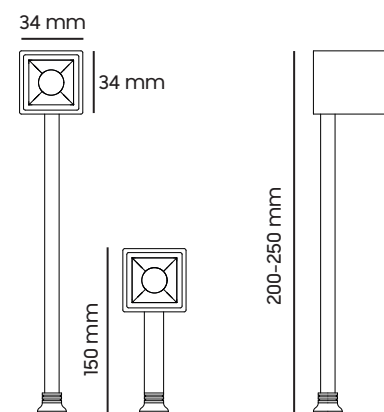


Footed 1S

Footed

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0.9

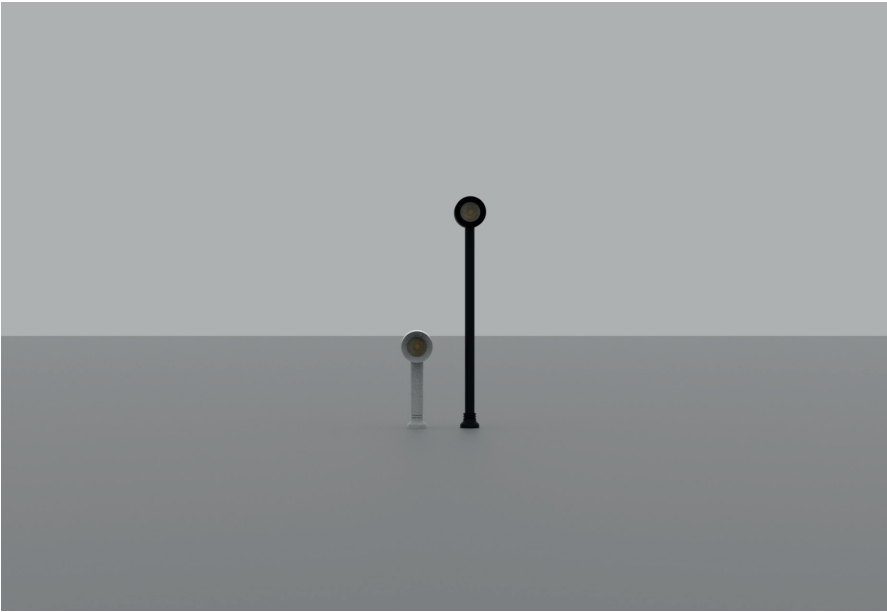


Light Distribution


Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Footed 1S	on-off/DALI	2W	370LM	90	220V-240V AC

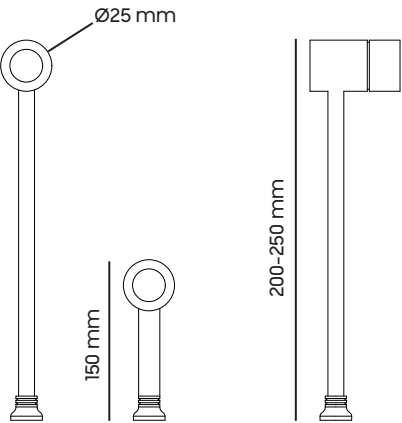

Line
Footed

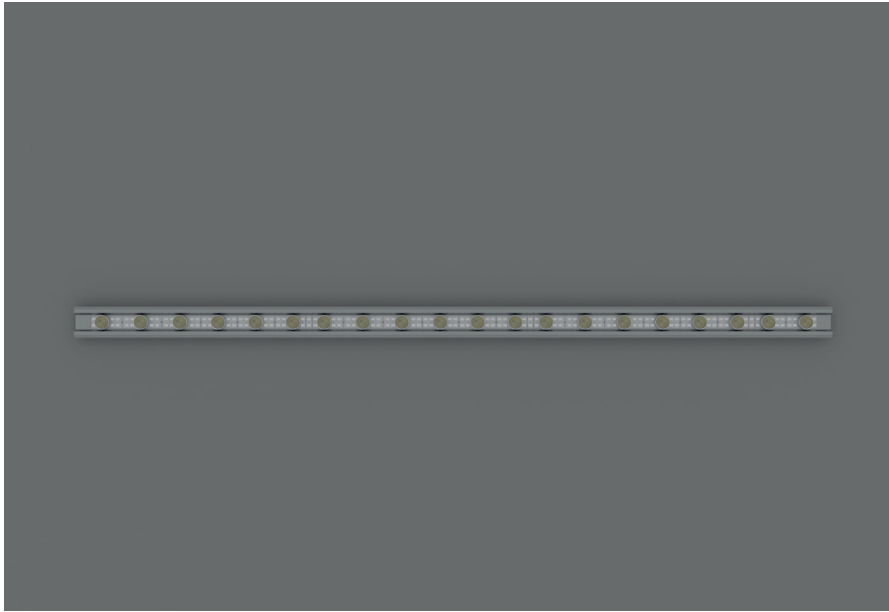

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

10° 25° 40° 60°


Body Color

RAL 9005 RAL 9005

Light Color


2700K 3000K 4000K 5000K 6500K RGBW

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Line	on-off/DALI	M/35	M/6000	90	220V-240V AC



Line Pipe

Footed

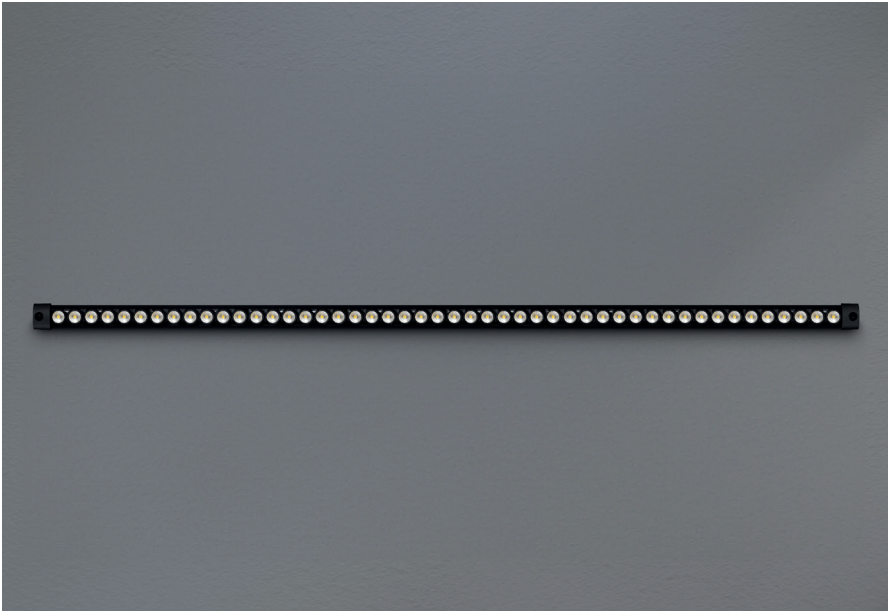

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0.9

Light Distribution

48° 36° 24°

Body Color

RAL 9005 RAL 9006

Light Color

RGBW 4500K 5000K 4000K 3000K 2700K

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage
Line Pipe	on-off/DALI	M/30	9000LM	90	220V-240V AC

