

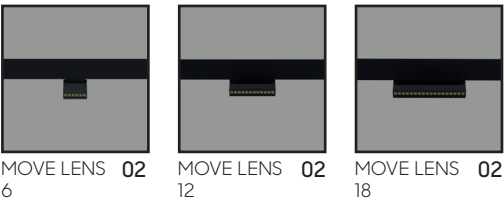
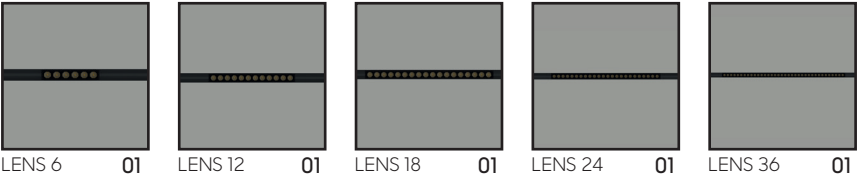


MAGNET



LENS

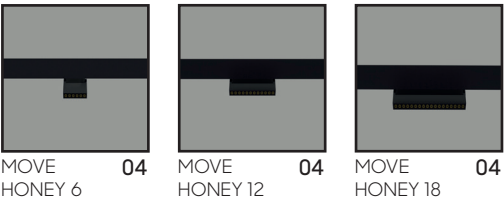


HONEY

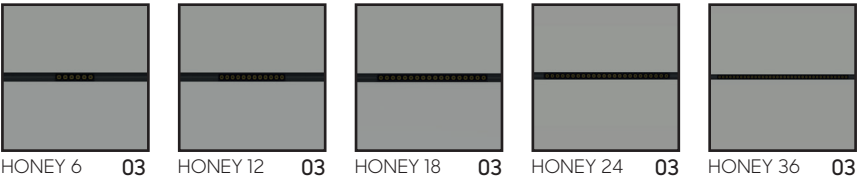



DIFFUSER

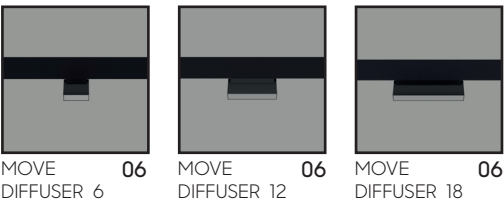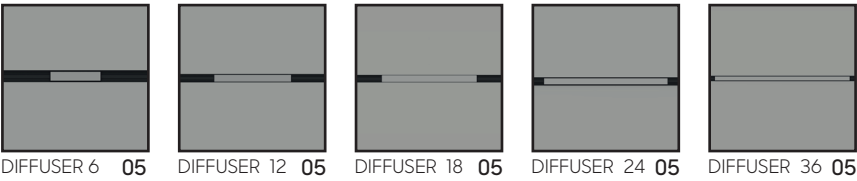


ASYMMETRIC

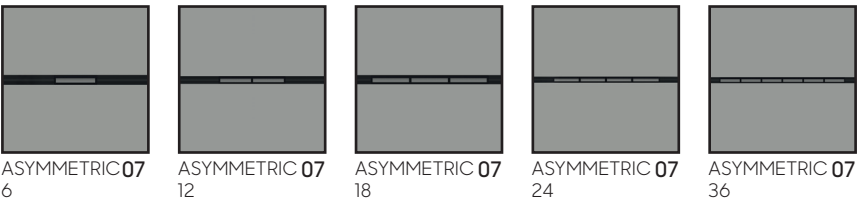

TRACK

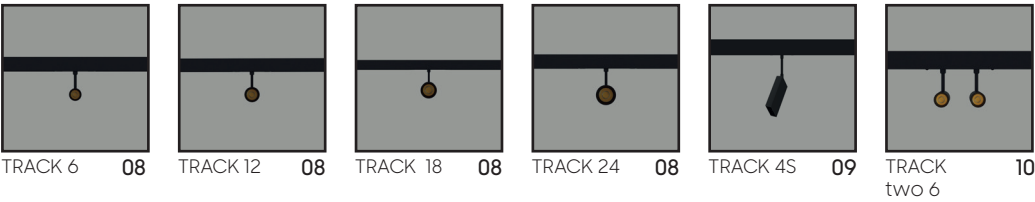

PENDANT



TRACK
PROFILE



RECESSED
PROFILE 13



SURFACE
PROFILE 13



TRIMLESS
PROFILE 13



RECESSED
CORNER TURN 13



SURFACE
CORNER TURN 13



TRIMLESS
CORNER TURN 13



RECESSED
VERTICAL
CORNER 13



SURFACE
VERTICAL
CORNER 13



TRIMLESS
VERTICAL
CORNER 13



RECESSED
COVER 13



SURFACE
MOUNTED
COVER 13



TRIMLESS
COVER 13

CONNECTOR



ENERGY
INTRODUCTION 14



INTER
CONNECTOR 14



T
CONNECTION 14



CORNER
CONNECTION 14



HANGER 14



JOINT PART 14



SPRING 01 14




SPRING 02 14



SIDE COVER 14

Lens

Lens

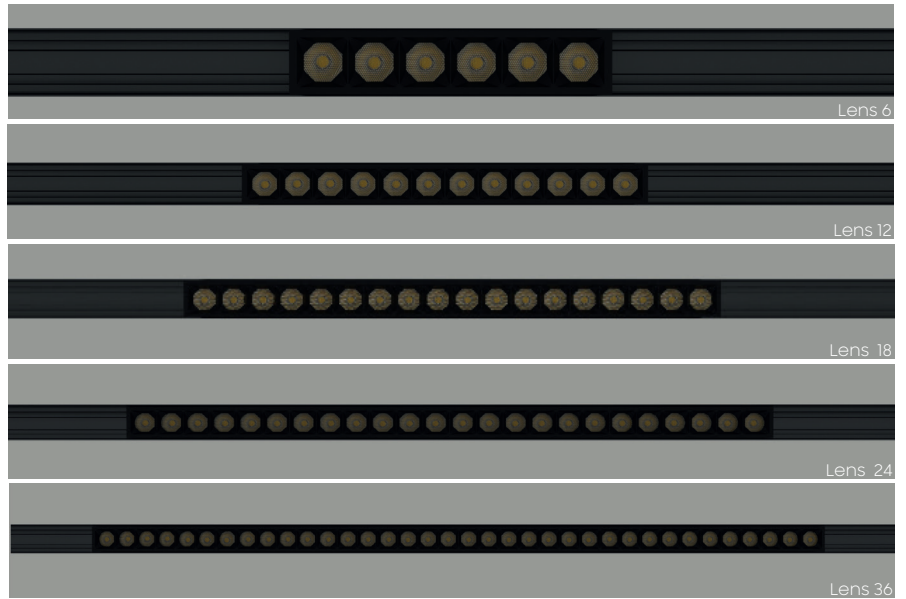

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Lens 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Lens 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Lens 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Lens 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Lens 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm

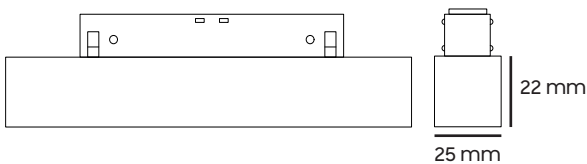

Move Lens

Lens

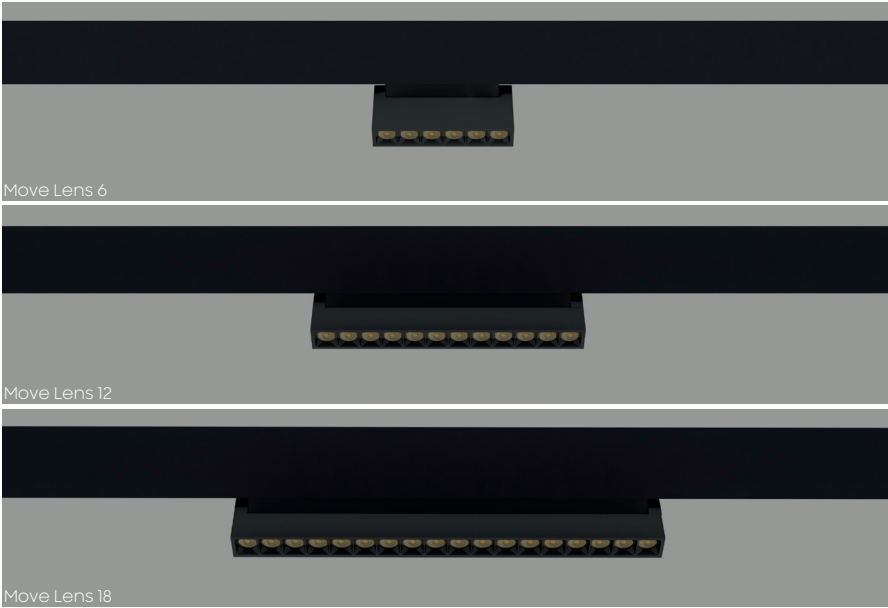

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Lens 6	on-off/DALI	6W	600LM	90	48V	111.5 x 25 x 100mm
Move Lens 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 100mm
Move Lens 18	on-off/DALI	18W	1800LM	90	48V	328 x 25 x 100mm



HoneyComb

Honey

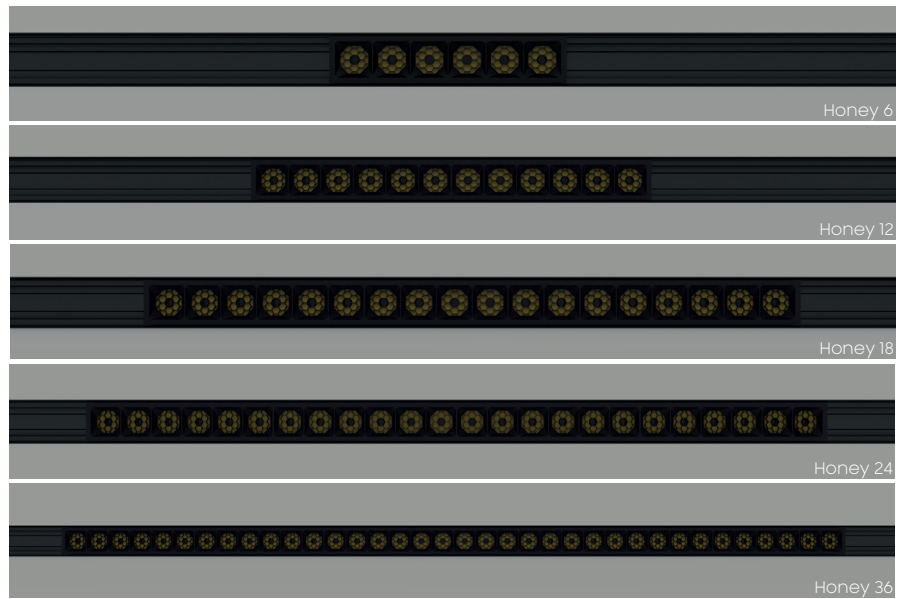

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Honey 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Honey 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Honey 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Honey 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Honey 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm

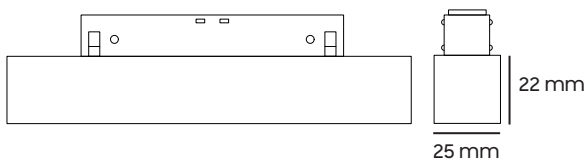

Move Honey

Honey

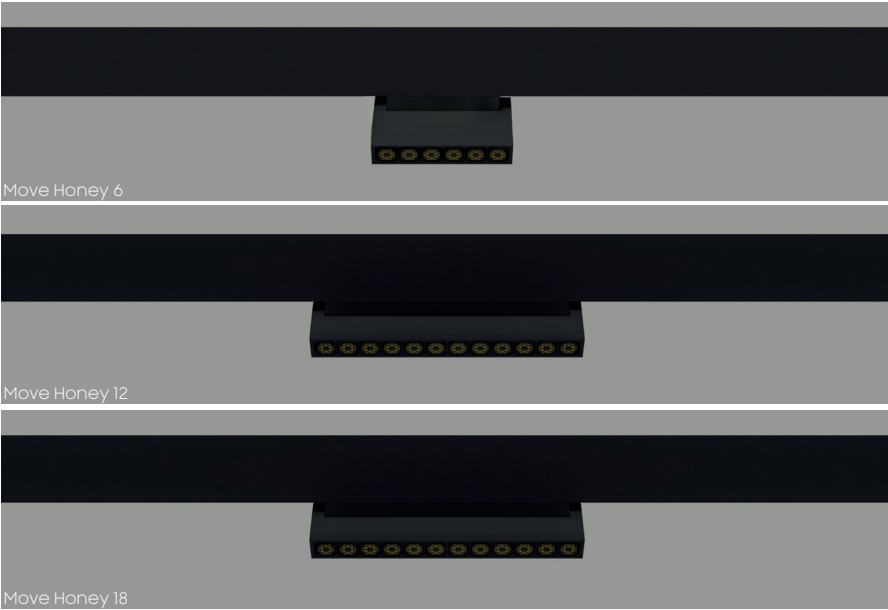

Quick info
 Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution





Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Honey 6	on-off/DALI	6W	600LM	90	48V	111.5 x 25 x 100mm
Move Honey 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 100mm
Move Honey 18	on-off/DALI	18W	1800LM	90	48V	328 x 25 x 100mm



100 mm

25 mm

Diffuser
Diffuser



Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Diffuser 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Diffuser 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Diffuser 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Diffuser 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Diffuser 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm



MOVE DIFFUSER

Diffuser




Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution

Body Color

Light Color

Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Move Diffuser 6	on-off/DALI	6W	600LM	90	48V	111.5 x 25 x 100mm
Move Diffuser 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 100mm
Move Diffuser 18	on-off/DALI	18W	1800LM	90	48V	328 x 25 x 100mm

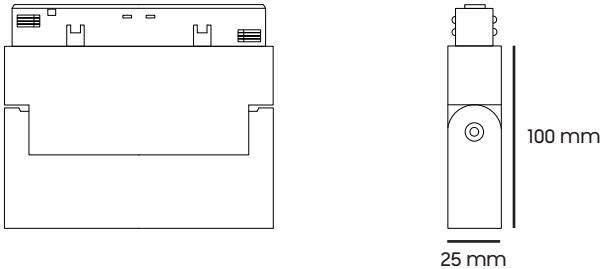

ASYMMETRIC

Asymmetric



Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Asymmetric 6	on-off/DALI	6W	600LM	90	48V	112 x 25 x 22mm
Asymmetric 12	on-off/DALI	12W	1200LM	90	48V	219 x 25 x 22mm
Asymmetric 18	on-off/DALI	18W	1800LM	90	48V	326 x 25 x 22mm
Asymmetric 24	on-off/DALI	24W	2400LM	90	48V	438 x 25 x 22mm
Asymmetric 36	on-off/DALI	36W	3600LM	90	48V	655 x 25 x 22mm



TRACK

Track

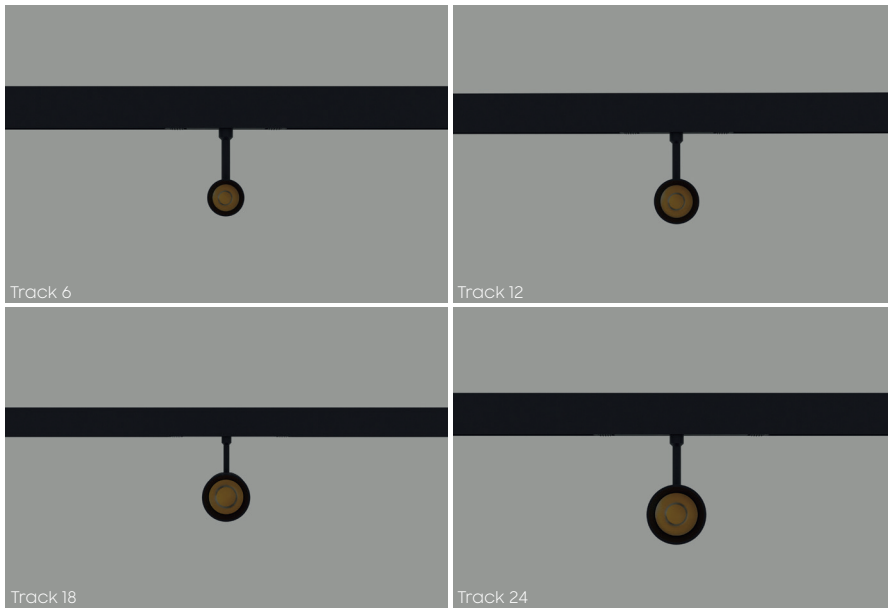

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution




Body Color



Light Color



Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Track 6	on-off/DALI	6W	600LM	90	48V	Ø35 x H: 80mm
Track 12	on-off/DALI	12W	1200LM	90	48V	Ø45 x H: 100mm
Track 18	on-off/DALI	18W	1800LM	90	48V	Ø55 x H: 120mm
Track 24	on-off/DALI	24W	2400LM	90	48V	Ø65 x H: 140mm

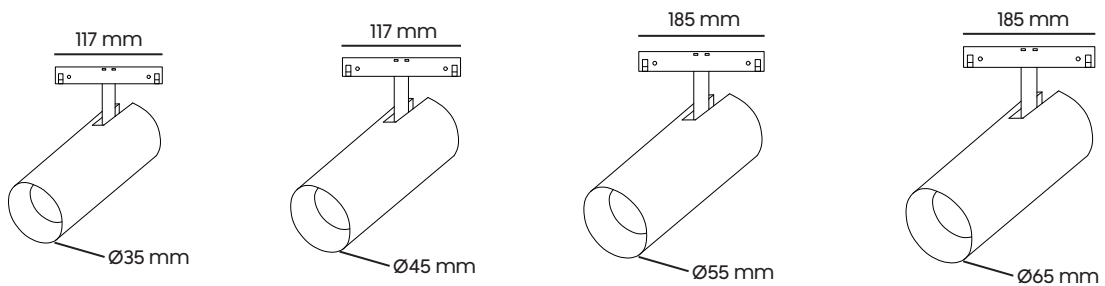


TRACK 4S

Track

Quick info

Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

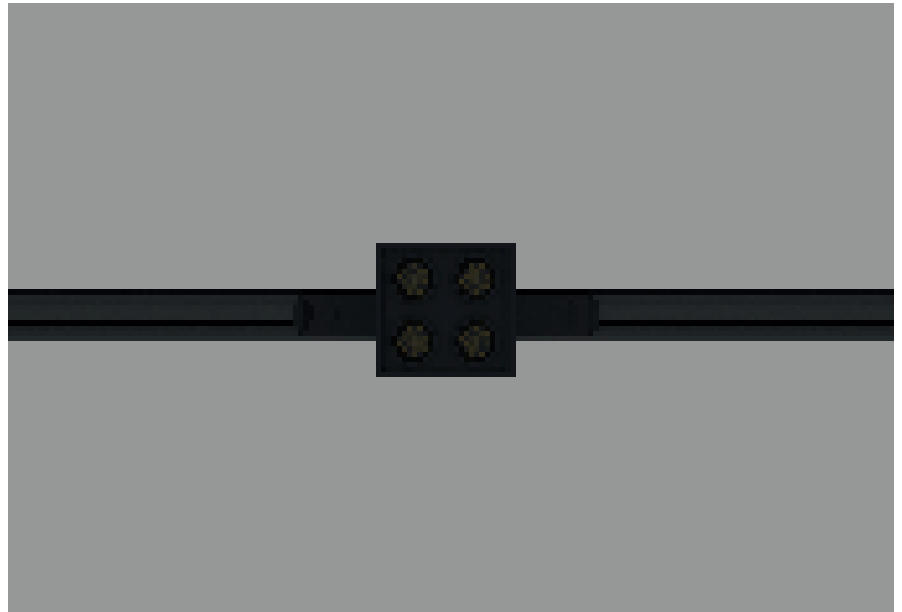


Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Track 4S	on-off/DALI	4W	400LM	90	48V	44 x 44 x 105mm

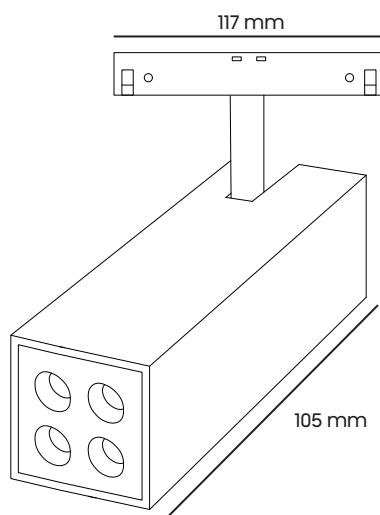

Track two 6

Track

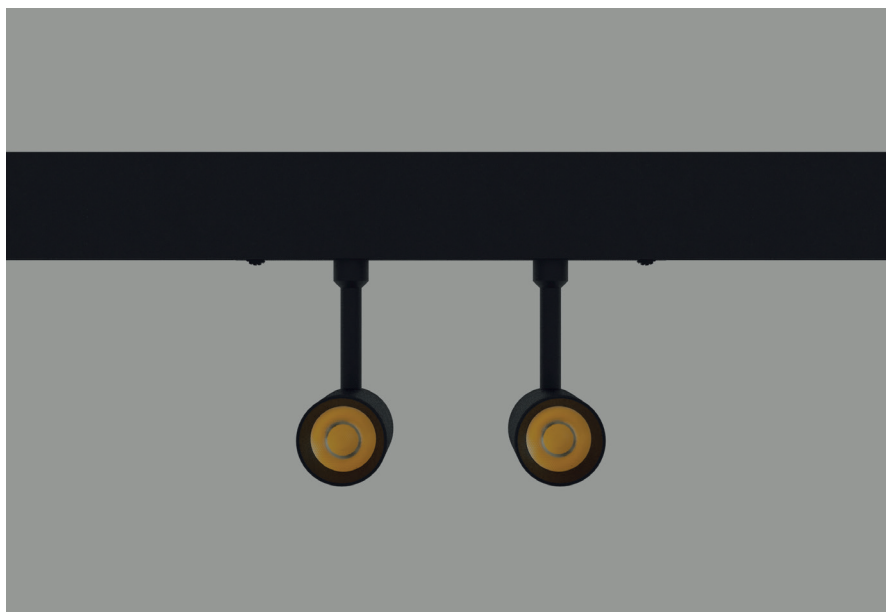

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0



Light Distribution




Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Track two 6	on-off/DALI	12W	1200LM	90	48V	Ø35 x H: 80mm

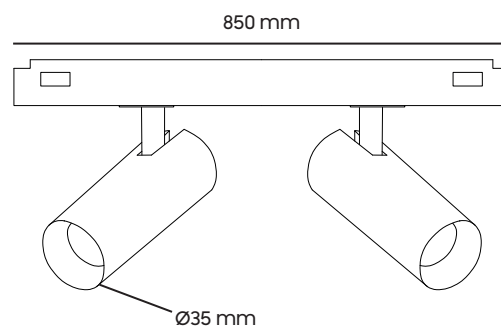

ZOOM

Track

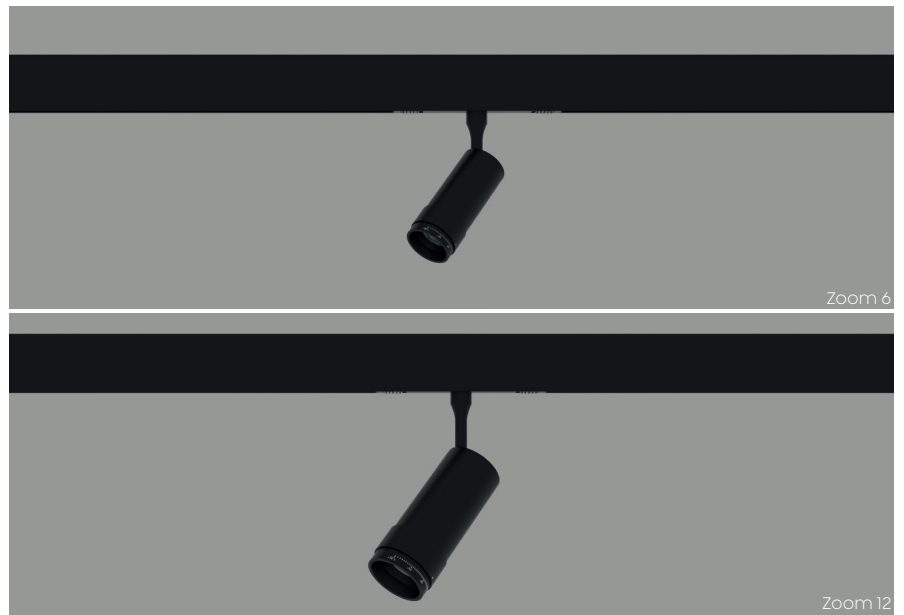

Quick info

Body: Aluminum
 Paint: Electrostatic powder
 Efficiency: >0.95
 Work-hour: LM80/50,000h
 MacADAM: Stage 3
 Voltage Frequency: 50~60Hz
 Electrical Protection Class: 2
 IK class: >0

Light Distribution





Body Color



Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Zoom 6	on-off/DALI	6W	600LM	90	48V	Ø35 x H: 86mm
Zoom 12	on-off/DALI	12W	1200LM	90	48V	Ø45 x H: 195mm



PENDANT

Pendant

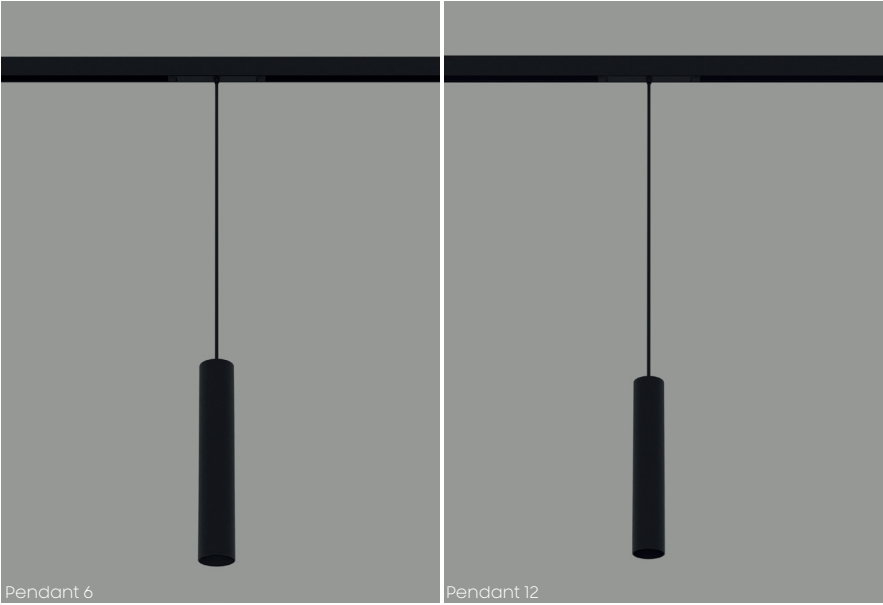

Quick info
Body: Aluminum
Paint: Electrostatic powder
Efficiency: >0.95
Work-hour: LM80/50,000h
MacADAM: Stage 3
Voltage Frequency: 50~60Hz
Electrical Protection Class: 2
IK class: >0

Light Distribution




Body Color




Light Color




Product Code	Control Type	Power	Luminous Flux	CRI	Voltage	Length
Pendant 6	on-off/DALI	6W	600LM	90	48V	Ø30 x H:350mm
Pendant 12	on-off/DALI	12W	1200LM	90	48V	Ø52 x H:300mm

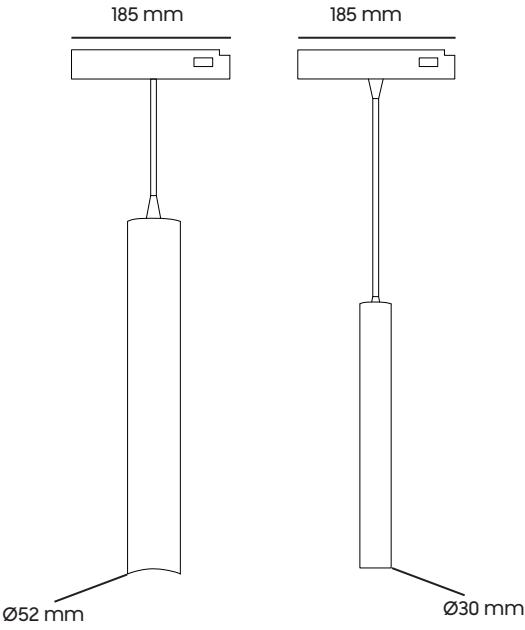


Track Profiles



Surface Mounted
Profile



Recessed Profile  30mm

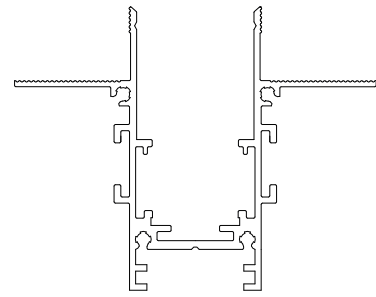

Trimless Profile  40mm

Connector



Recessed Corner Turn



Surface Corner Turn



Trimless Corner Turn



Recessed Vertical
Corner



Surface Vertical
Corner



Trimless Vertical
Corner



Surface Mounted
Cover



Recessed Cover



Trimless Cover

Connector



Energy Introduction



Interconnector



T connection



Corner Connection



Hanger



Joint Part



Spring



Spring